



SCRUBBER DRYERS GHIBLI

Series

2



RUGGED, RELIABLE
AND EASY TO OPERATE

A RANGE OF SCRUBBER DRYERS

designed to satisfy all types of cleaning jobs

Series **2**



The modern but simple design is an integral feature of the functionality of the **S2**.



recovery tank

solution tank



1

The control panel has onboard diagnostic, battery hour counter and potentiometer to adjust the working speed as well as a socket for cellular phone charging.

3


The squeegee tool is governed by a parallelogram. The handle is adjustable and the S2 can be equipped with a battery charger(optional).

2

The recovery tank has an air cylinder in order to facilitate the opening and the access to batteries and vacuum.


4

Large tank opening to allow fast and easy water filling with a standard hose, provided with a universal connection, that can also be used for the cleaning of the tanks.

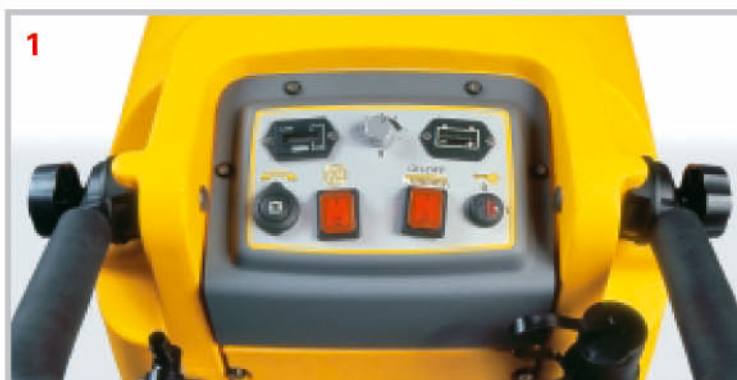



A small computer unit receives information on the machine functions, including the diagnostic, standard on all the double traction models.

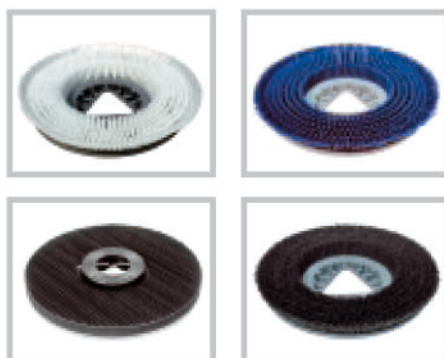

A large range of PP and tynex brushes and of padholders equips the unit for any cleaning task.



A strong frame, a well industrialized differential gear, a heavy duty electromagnetic valve and a stainless steel filter complete the machines' components.

"Series 2" SCRUBBER DRYERS RANGE

TECHNICAL FEATURES	Measurement units	80 D 65	80 D 70
Type of drive	---	Electrical	
Tension	V	24	24
Cleaning width	mm	650	700
Squeegee width	mm	850	950
Squeegee actioning	---	Manual	
Solution tank	l	80	80
Recovery tank	l	90	90
Vacuum	---	Sensors	
Water filter	---	Stainless steel	
Brush qty - Ø	mm	2 x 335	2 x 360
Brush motor	Nr. - W	2 x 400	2 x 400
Brush speed	rpm	190	190
Brush pressure	---	Constant	
Motor traction	W	250	250
Vacuum motor (3 stage)	V - W	24 - 570	24 - 570
Suction vacuum	mm H ₂ O	1350	1350
Advancement speed	Km / h	0 ÷ 4,5	0 ÷ 4,5
Handle	---	Adjustable	
Front wheels Ø	mm	2 x 225	2 x 225
Directional wheels Ø	Nr. / mm	2 x 100	2 x 100
Water charging hose	---	Standard	
Socket for cellular phone battery charging	---	Standard	
Diagnostic display	---	Standard	
Recommended battery (gel)	V - Ah	6 V - 4 x 200 Ah (C 20 Ah)	
Dimensions (l-w-h)	mm	1250x660 x1030	1270x710 x1030
Battery charger on board	---	Optional	



The brush head comes standard with two powerful motor reducers, bumper and splash guard.



A large opening on top of the solution tank allows easy access for cleaning purposes.

